

Minimum Height Clearance for Installation = 14020mm [46']

This structure meets or exceeds the following: Design Wind IBC-2012; 120MPH Basic wind speed; NBC 2005, Section 4.1.7; DIN 4112 Wind Pressure 0.5kPa; Snow load is not considered; Fire - ULC S109, Calif. Fire Marshall, M2; NFPA 701. User Note: This structure is designed for temporary use. Tent integrity is a direct function of installation quality. Follow installation instructions, adding stakes as conditions require. Do not exceed design parameters or local ordinances for public assembly. Stakes & guying indicated on this drawing may or may not be appropriate for soil & site conditions. When in doubt, consult local engineer. Dimensions shown in millimetres unless stated otherwise. **CLIMBING ON TENT CAN RESULT IN INJURY OR DEATH**


\\vfs\tentshare\A_Product\AAMasterEngineer\50.32.110.dwg Printing: May 18, 2016-14:16

tentnology co.
15427 66th Avenue Surrey B.C. Canada V3S 2A1
Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com

SADDLESPAN S5000 SL OPEN General Arrangement			
Project: S5000	Scale: NTS	Sheet No: 1 of 1	
Dwg By: KM	Date: 14 JAN 2011	File:	
Ck'd By: ALI	App'd: <i>GN</i>	50.32.110	


This drawing is for reference purposes only. Contact Tentnology® for specific details and site requirements.

USA Patents 5,899,028, 8,701,689 B2, Korea 411,858; Canada, European and other foreign patents pending. SaddleSpan® is a registered trademark of Tentnology in Canada, USA, Mexico, Korea.

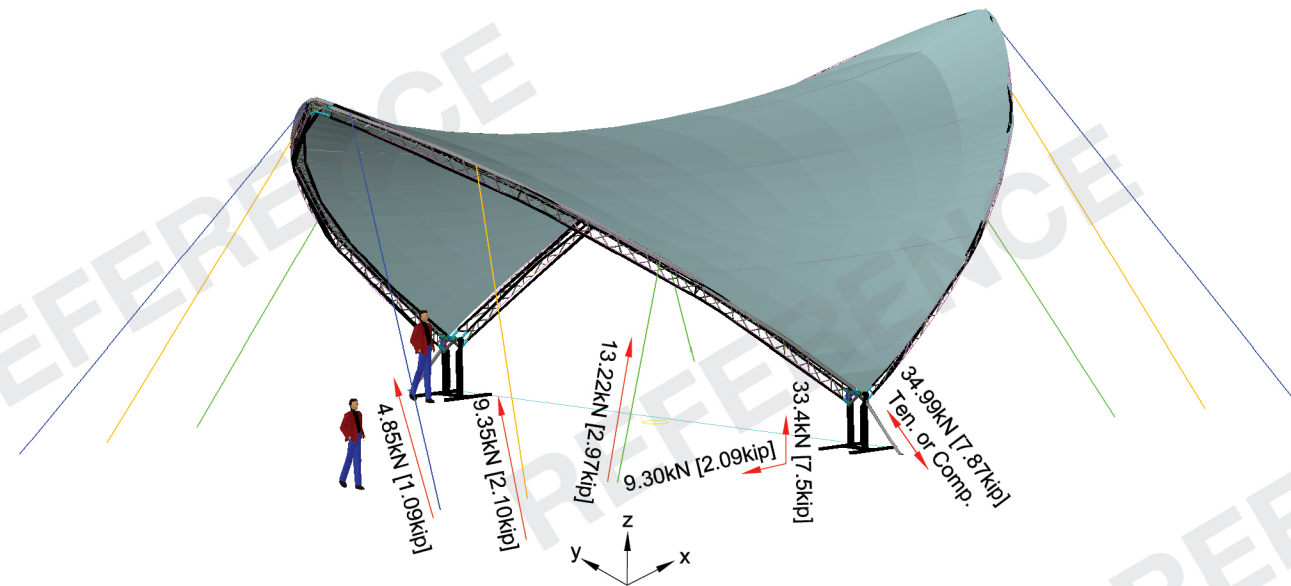


Reaction Forces at Design Wind


Plan Area: 150m² [1620ft²]

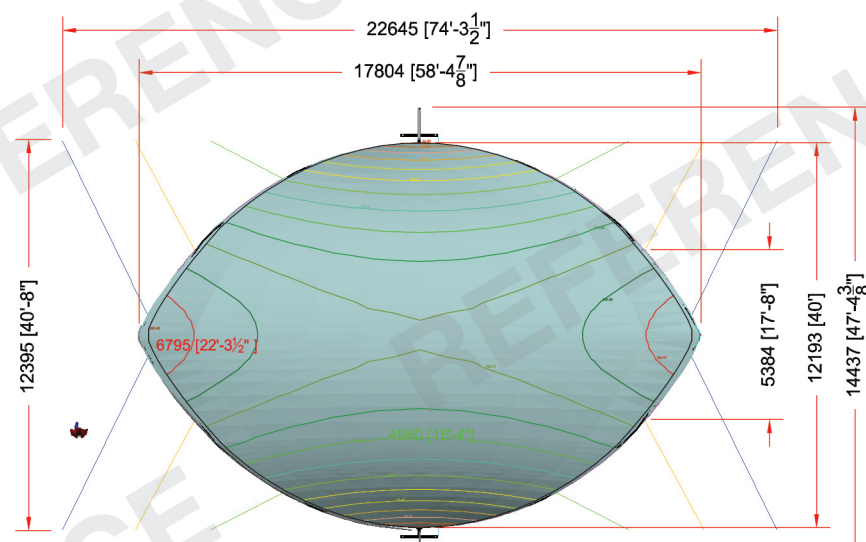



Contours at 429mm (16.89") vertical height spacing

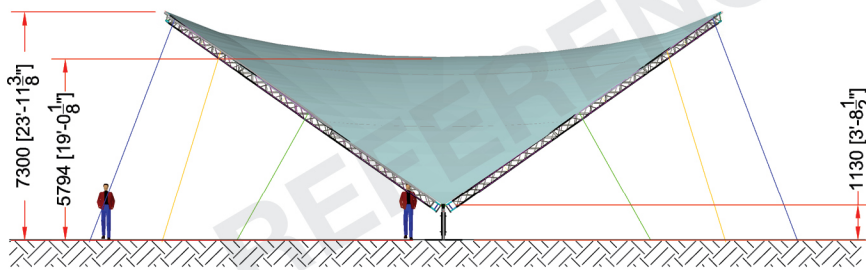

Minimum Height Clearance for installation : 12200mm [40']


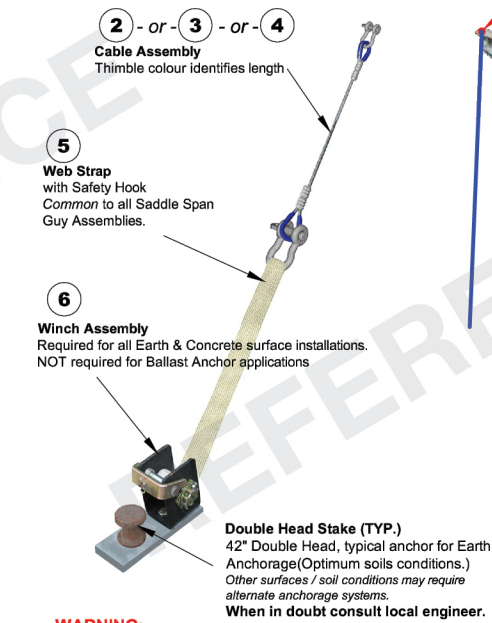


WARNING:
Possible underground hazards.

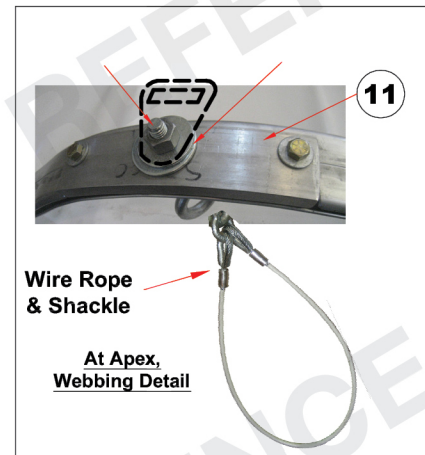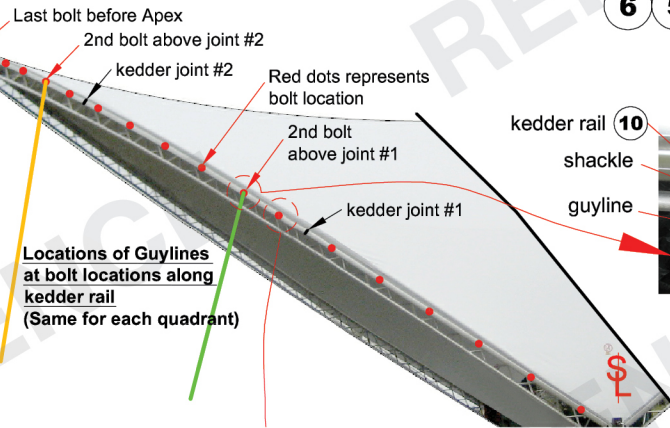

Wire Rope & Shackle
At Apex, Webbing Detail

Hanging load at each location of MID sleeve joints is 240 lbs Max.

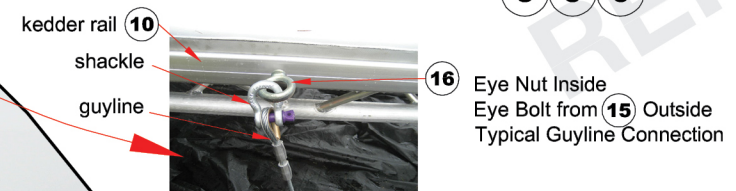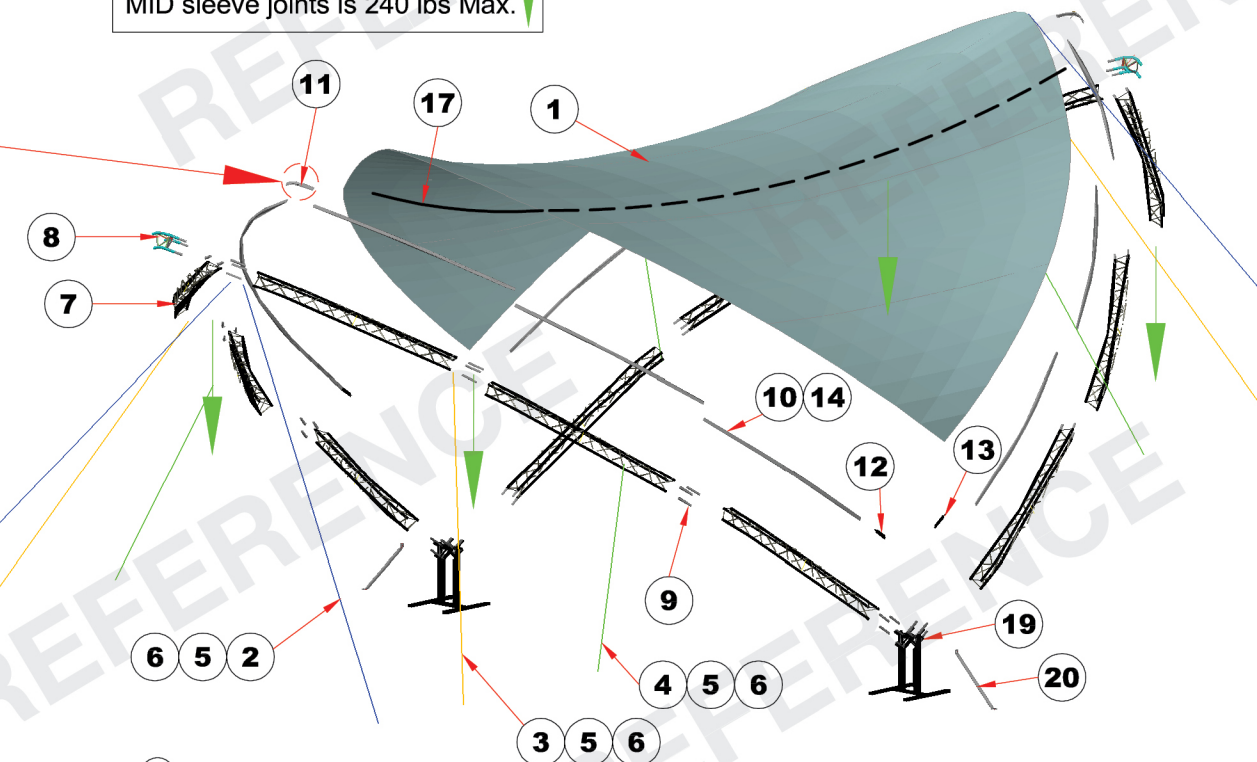

Eye Nut Inside Eye Bolt from (15) Outside Typical Guyline Connection

This drawing is for reference purposes only. Contact Tentnology® for specific details and site requirements.


USA Patents 5,899,028, 8,701,689 B2, Korea 411,858; Canada, European and other foreign patents pending. SaddleSpan® is a registered trademark of Tentnology in Canada, USA, Mexico, Korea.

This structure meets or exceeds the following : Design Wind IBC-2012; 109 MPH Basic wind speed; NBC 2005, Section 4.1.7; DIN 4112; Snow load is not considered; Fire - ULC S109, Calif. Fire Marshall, M2; NFPA 701. User Note: This structure is designed for temporary use. Tent integrity is a direct function of installation quality. Follow installation instructions, adding stakes as conditions require. Do not exceed design parameters or local ordinances for public assembly. Stakes & guying indicated on this drawing may or may not be appropriate for soil & site conditions. When in doubt, consult local engineer. Dimensions shown in millimetres unless stated otherwise.


CLIMBING ON TENT CAN RESULT IN INJURY OR DEATH
\\vs\stentshare\A_Product\AAMasterEngineer\ 50.32.210.dwg Printing: May 18, 2016-14:14

tentnology co.		S2000 SL OPEN	
15427 66th Avenue Surrey B.C. Canada V3S 2A1		General Arrangement	
Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com		Project: S2000 SL	Scale: NTS
Dwg By: RB	Date: 13 MAY 11	File:	Sheet No: 1 of 1
Ck'd By: ALI	App'd: <i>GN</i>	50.32.210	



Rev #	Date	By	Description
5	03 Jul 14	JM	Revised Max Reactions
6	23nov2015	KM	Add Apex kedder rail and left and right kedder rail ends at base
7	13may2016	KM	change 30.60.538 to 30.60.236 apex with kedder lock

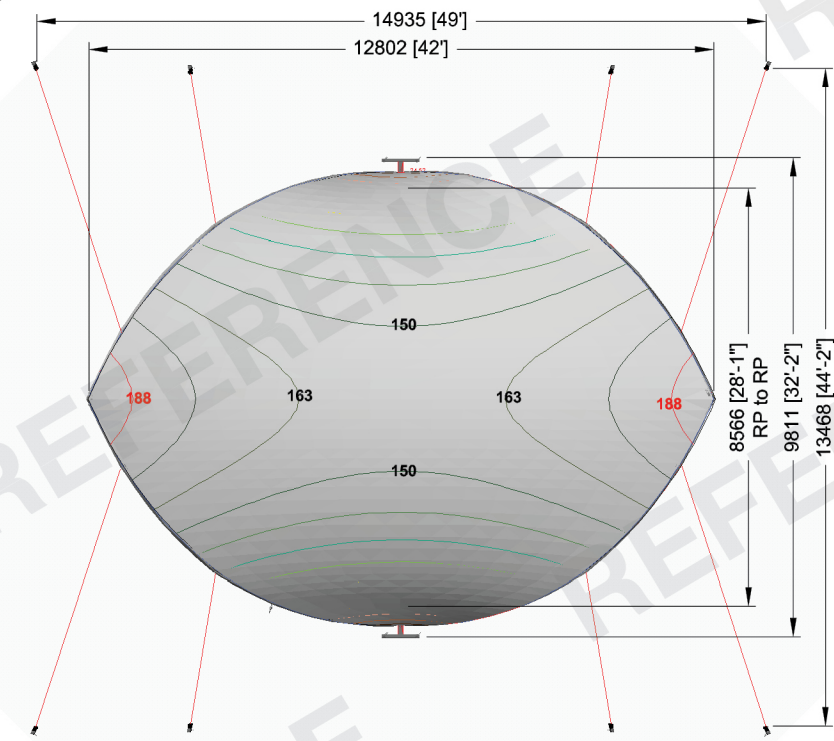

Contours \approx 318mm (12.5") vertical height spacing.
Area = 88m² (951ft²)

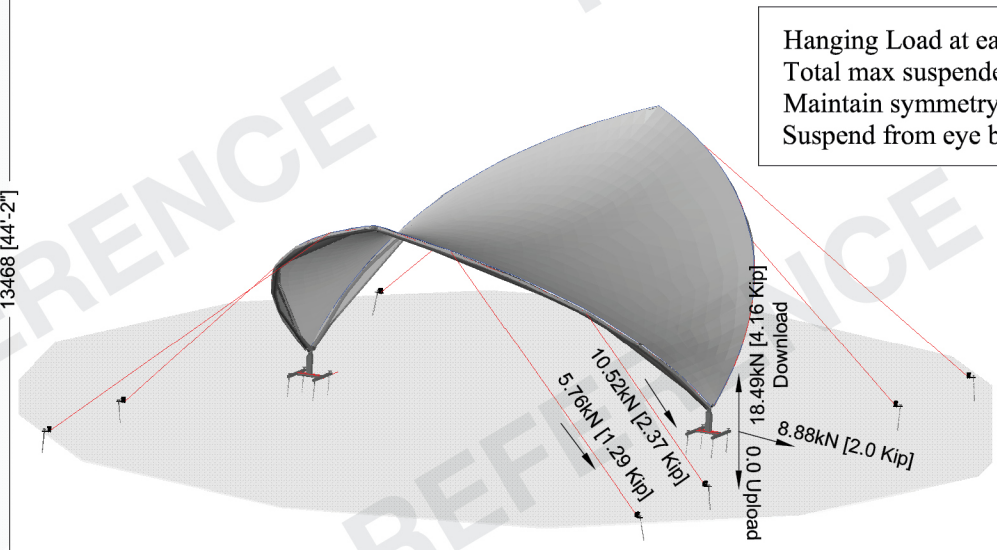

Hanging Load at each midpoint not to exceed 200 lb.
Total max suspended load = 4 midpoints x 200 lb = 800 lb.
Maintain symmetry about longitudinal axis.
Suspend from eye by replacing nut on eyebolt with eye nut.

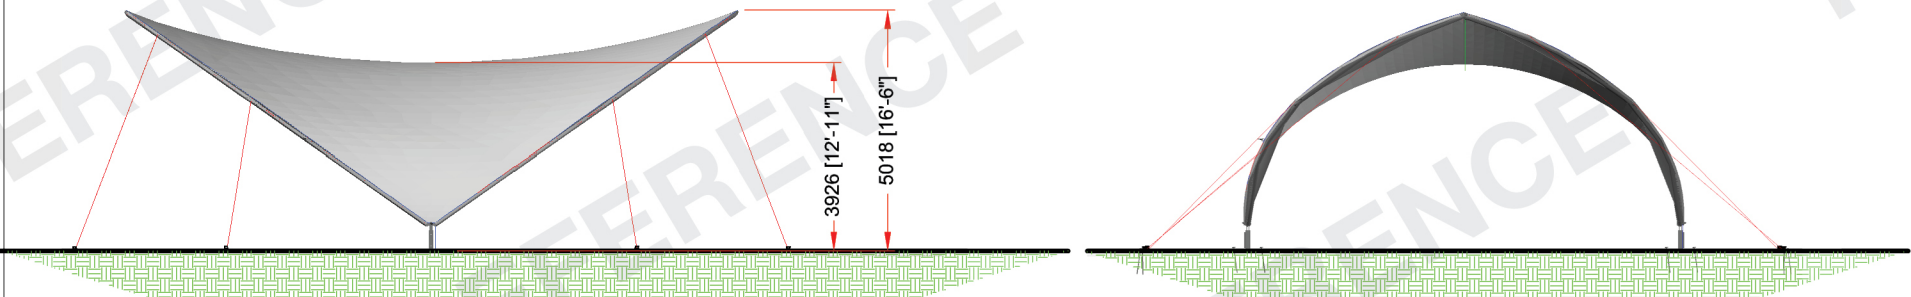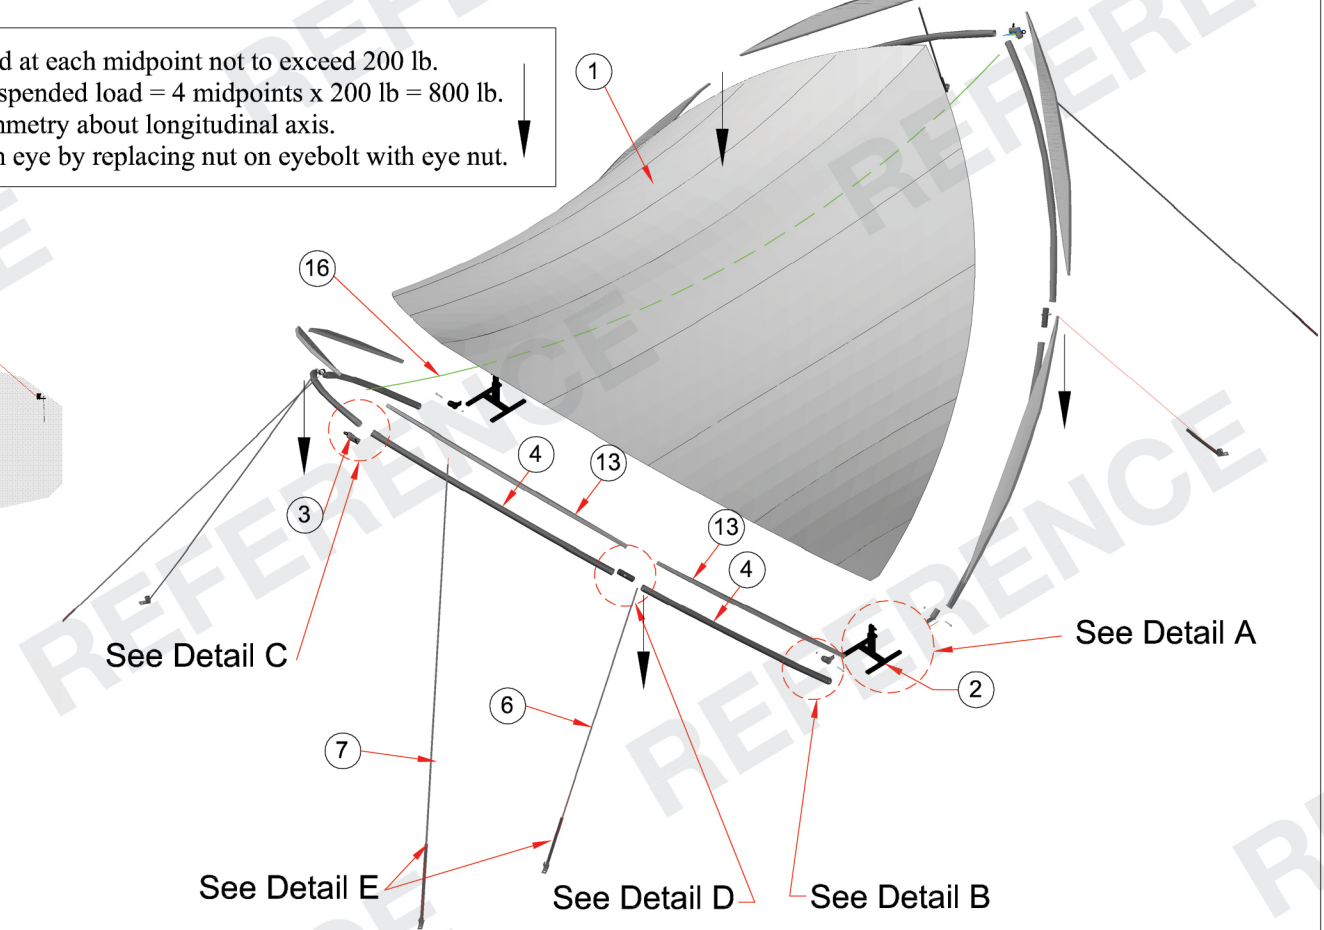

**This drawing is for reference purposes only.
Contact Tentnology® for specific details
and site requirements.**

This structure meets or exceeds the following: Design Wind IBC-2012; 115 MPH Basic wind speed; NBC 2005, Section 4.1.7; DIN 4112 Wind Pressure 0.5 kPa; Snow Load not considered; Fire - ULC S109, Calif. Fire Marshall, M2; NFPA 701. User Note: This structure is designed for temporary use. Tent integrity is a direct function of installation quality. Follow installation instructions, adding stakes as conditions require. Do not exceed design parameters or local ordinances for public assembly. Stakes & guying indicated on this drawing may or may not be appropriate for soil & site conditions. When in doubt, consult local engineer. Minimum clearance height required for installation = 8500mm = 28 ft. **CLIMBING ON TENT CAN RESULT IN INJURY OR DEATH**

tentnology co.

15427 66th Avenue Surrey B.C. Canada V3S 2A1
Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com

SADDLE SPAN S1000 SL Open
Engineering General Arrangement

Project: S1000 SL	Scale: NTS	Sheet No: 1 of 1
Dwg By: KM	Date: 12 Oct.2011	File: 50.32.405
Ck'd By: ALI	App'v'd: <i>GN</i>	